


B200006

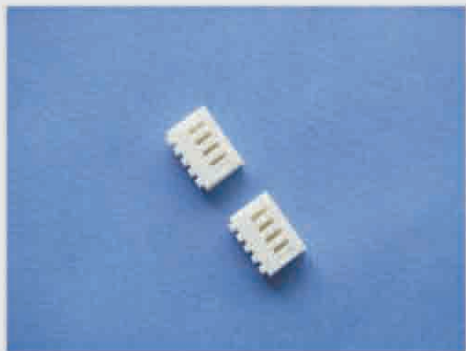

▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : --
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 800V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A

产品尺寸图 Product size chart

单位: mm 一般公差: ± 0.20

HOUSING

B200006-2

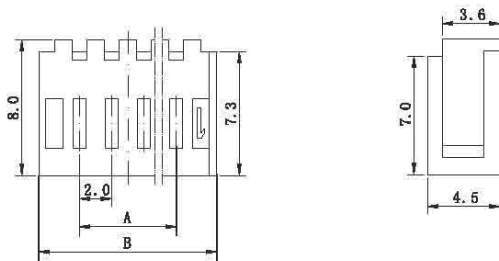

HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B200006-2-02	2.0	7.0	
3	B200006-2-03	4.0	9.0	
4	B200006-2-04	6.0	11.0	52075-0410
5	B200006-2-05	8.0	13.0	
6	B200006-2-06	10.0	15.0	
7	B200006-2-07	12.0	17.0	
8	B200006-2-08	14.0	19.0	
9	B200006-2-09	16.0	21.0	
10	B200006-2-10	18.0	23.0	
11	B200006-2-11	20.0	25.0	
15	B200006-2-15	28.0	33.0	